


GSMD-VBR

VIBRATION SIGNALING DEVICE FOR CEIA GSMDs

Main Features


- Plugs directly to the GSMD Headphone Connector
- MIL-D1 and CMD compatible
- No removal needed when Detector is folded
- No maintenance required
- It allows the operator to turn the internal speaker off when the volume knob is at the minimum
- Low Power Consumption
- Embedded 32-bit microcomputer
- Operating at Full Depth with CMD/DW

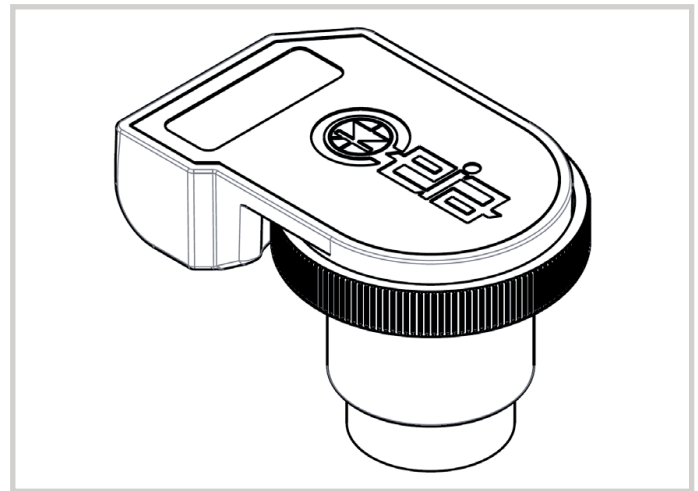

Technical Specifications

Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 80°C
MTBF	200,000 cycles @ 20°C ambient temperature
Power Consumption	GSMD Off: 0 mA
	GSMD On: 14 mA
	GSMD in alarm: 80 mA
Dimensions	52.5 mm x 37 mm x 35.5 mm
Weight	45 grams
Protection Degree [according to IEC 529]	IP68

Mechanical Dimensions [mm]

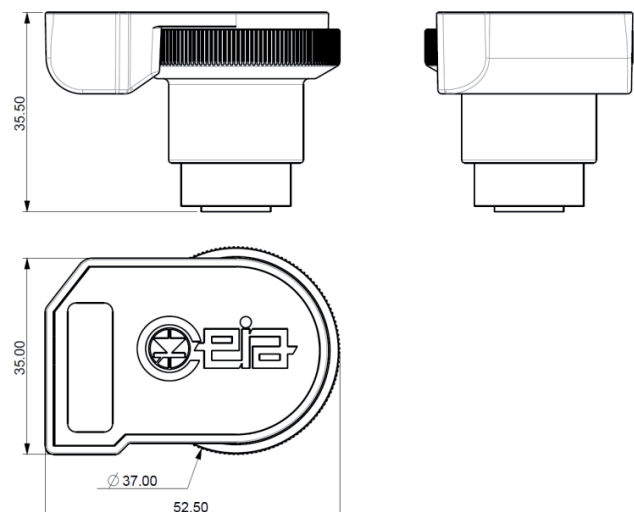

Zona Ind.le Vicinomag. 54/G-56, 52041 Arezzo (ITALY)

Phone: +39 0575 418319 • Fax: +39 0575 418276 • E-mail: info@gsmd@ceia-spa.com

www.ceia.net

CEIA reserves the right to make changes, at any moment and without notice, to the models (including programming), their accessories and options, to the prices and conditions of sale

FT140K0032V1000xUK